





# EJ™ 3400 Insulation Jacketing Material

PTFE/FIBERGLASS COMPOSITES ENGINEERED FOR REMOVABLE INSULATION SERVICE

## EJ™ 3400 Gray Description:

This PTFE/fiberglass composite is designed for use in heavy weight insulation jacketing applications. The standard material has a pigmented PTFE coating on one side and an dark PTFE coating on the other side.

- **Successfully used in insulation jacketing service since 1985.**
- **Special coating technology for industrial fabrication**
- **Severe chemical and temperature exposure capabilities**
- **Variations available upon request**
- **Easily sewn**
- **Flame-resistant**

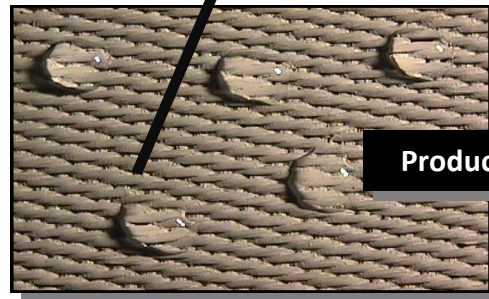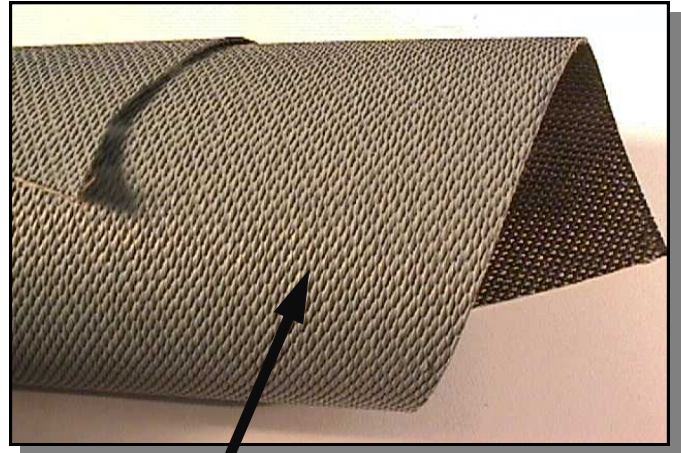

Product Close-up

## EJ™ 3400 PROPERTIES

<b>Upper Use Temperature:</b>	600°F (316°C) Continuous Service
<b>Overall Weight:</b>	34.0 oz/yd <sup>2</sup> (1153 g/m <sup>2</sup> )
<b>Thickness:</b>	0.034 inches (0.86 mm)
<b>Width:</b>	60 inches (1524 mm) Nominal
<b>Tensile Strength (Warp):</b>	425 lbs/inch (3721 N/50 mm)
<b>Tensile Strength (Fill):</b>	360 lbs/inch (3150 N/50 mm)

**This material does not contain an illegal or detectable level of PFOA or PFOS in parts per trillion.**

EJ™ is a trademark of TCI (Textiles Coated International). This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.

TEXTILES COATED INTERNATIONAL | Manufacturer of High-Performance Fluoropolymer Films, Laminates, and Composites

200 Bouchard Street, Manchester, NH 03103 USA PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilescoated.com