




Reveal™ ETFE Fluoropolymer Extruded Films

ETHYLENE TETRAFLUOROETHYLENE FILM FOR USE IN ARCHITECTURAL APPLICATIONS

TCI's Reveal™ ETFE films are produced from ethylene and tetrafluoroethylene copolymer resin by melt extrusion. Reveal™ ETFE films can be heat-sealed, thermoformed, and laminated to various substrates. These materials are ideally suited for architectural applications.

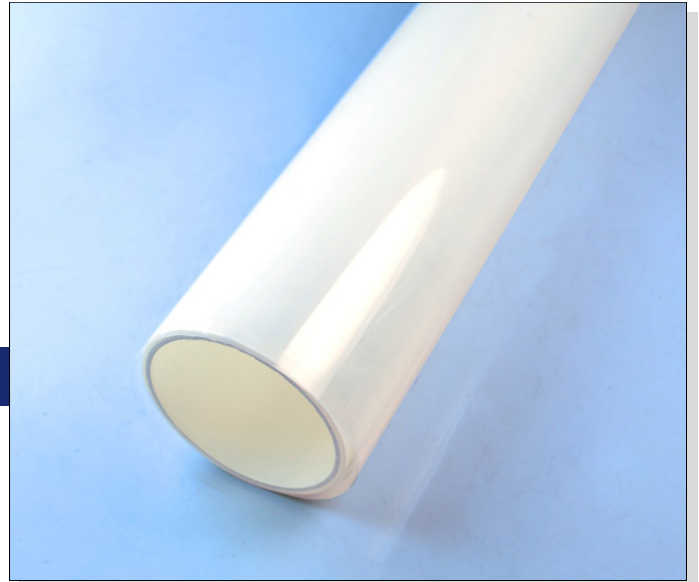


TCI's Reveal™ ETFE Film Characteristics

- Thickness up to 0.012" (350 µm)
 - Standard width: 61" (1,550 mm)
 - Width up to 62" (1,575 mm) available
 - Any slit widths available upon request
-
- Broad continuous use temperature range from -328°F to 330°F (-200°C to 165 °C)
 - Excellent non-stick / release properties
 - High elongation and tear resistance
 - Excellent light transmission (>90%) and clarity, high transmittance of ultraviolet and all but far infrared wavelengths
 - Superior weatherability in outdoor exposure
-
- Free of plasticizers, processing aids, or additives
 - Low permeability to liquids, gases, moisture, and organic vapors

TCI's Reveal™ ETFE Films Availability

Reveal™ ETFE AG (Architectural Grade)

- Manufactured from 100% virgin premium grade ETFE resin
- ETFE AG is the grade of choice for applications requiring visual perfection
- ETFE's unique combination of high light transmission, clarity, and durability make it an invaluable material for applications such as architectural roofing
- Available in clear, white, or printed films for solar control and shading. Examples of standard patterns include:

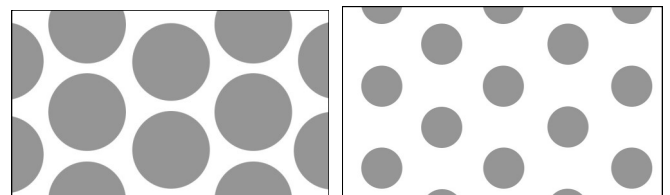

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.

TEXTILES COATED INTERNATIONAL | Manufacturer of High-Performance Fluoropolymer Films, Composites, and Laminates

200 Bouchard Street, Manchester, NH 03103 USA PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilecoated.com



Reveal™ ETFE Fluoropolymer Extruded Films

ETHYLENE TETRAFLUOROETHYLENE FILM FOR USE IN ARCHITECTURAL APPLICATIONS

			Reveal™ ETFE AG
General Properties	Units	Test Method	
Specific Gravity		ASTM D792	1.74
Area Yield	ft ² /lb/mil (m ² kg/25μm)		110 (22.6)
Flammability		UL-94	V-0
Water Absorption	%		<0.03
Mechanical Properties			
Tensile Strength	psi (MPa)	ASTM D882	7,000 (48)
Elongation at Break	%	ASTM D882	300
Tensile Strain at Break (8 mil film)	%	DIN 527-1 (MD/TD)	622
Tensile Stress at 10% Strain (8 mil film)	MPa	DIN 527-1 (MD/TD)	44
Tensile Modulus	psi (MPa)	ASTM D882	140,000 (965)
Initial Tear Strength (2 mil film)	g	ASTM D1004	500
Propagation Tear Strength (2 mil film)	g	ASTM D1922	75
Folding Endurance (MIT)	cycles, ave.	ASTM D2176	>50,000
Thermal Properties			
Continuous Use Temp	°F (°C)	UL-746 B	330 (165)
Melt Point	°F (°C)	ASTM D3418	500 (260)
Coeff. of Lin. Thermal Expansion	in/(in °F)	ASTM D696	4x10 ⁻⁵
Optical Properties			
Refractive Index		ASTM D542	1.4
Light Transmission	%	ASTM E424	90
Product Offering			
Width	inches (mm)		Up to 62" (1,570)
Thickness	mils (μm)		4 (100), 6 (150), 8 (200), 10 (250), 12 (300), 14 (350)
Standard Colors			White, Clear

The above table contains typical representative values and is not to be used for product specification. Contact TCI for a formal specification.

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.