



# CrossFilm™ 2160 Conductive Tank Sealing Material

## 100% PTFE LAMINATE ENGINEERED FOR TANK SEALING SERVICE


### **CrossFilm™ 2160 Conductive:**

CrossFilm™ 2160 Conductive is a PTFE laminate that has been engineered for both wet and dry service in above ground storage tanks. It is made up solely of PTFE, which means the material is, essentially, chemically inert. Unique multidirectional strength and stress crack resistance allow this flexible, 0.060" (1.63 mm), PTFE product to perform without the need for a fiberglass reinforcement, which is susceptible to chemical attack and fatigue failure. The product can operate in a temperature range that extends to 600°F (316° C). The nonporous membrane can be fabricated into many shapes using heat sealing techniques.

- **Flexible, tear resistant, all-PTFE material**
- **Cannot be chemically attacked**
- **Easily fabricated using heat sealing techniques**
- **Wide operating temperature range**
- **Nonporous**



**CrossFilm™ Technology:** Breakthrough technology now permits thick PTFE liners to be used in expansion joint service without the fear of stress cracking due to severe operating conditions. As witnessed by

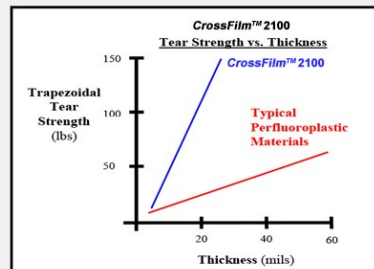

the chart, CrossFilm™ is a different perfluoroplastic altogether. It is easy to see why one judge for Chemical Processing's Vaaler Award concluded, "This is the first major improvement in the fluoroplastic industry since its introduction some 40-odd years ago."

## CROSSFILM™ 2160 CONDUCTIVE PROPERTIES

<b>Upper Use Temperature:</b>	600°F (316°C) Continuous Service
<b>Overall Weight:</b>	90 oz/yd <sup>2</sup> (3052 g/m <sup>2</sup> )
<b>Thickness:</b>	0.060 inches (1.63 mm)
<b>Width:</b>	60 inches (1524 mm), special widths available
<b>Tensile Strength:</b>	190 lbs/inch (1664 N/50 mm)
<b>Tear Strength:</b>	152 lbs (676 N)
<b>Surface Resistivity:</b>	< 300,000 ohms/sq

CrossFilm™ is a trademark of TEXTILES COATED INCORPORATED. Patents worldwide This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.